



MASTER INSTRUMENT CORPORATION

SINGLE-PHASE BRIDGE RECTIFIER KBU10A THRU KBU10M


VOLTAGE RANGE 50 to 1000 Volts
CURRENT 10.0 Amperes

FEATURES

- I Low cost
- I This series is UL recognized under component index , file number E127707
- I High forward surge current capability
- I Ideal for printed circuit board
- I High temperature soldering guaranteed:
260 °C/10 second, 0.375" (9.5mm) lead length at 5 lbs.(2.3kg) tension.

MECHANICAL DATA

- I Case: Transfer molded plastic
- I Terminal: Lead solderable per MIL-STD-202E method 208C
- I Polarity: Polarity symbols marked on case
- I Mounting: Thru hole for #6 screw, 5 in.-lbs torque max
- I Weight: 0.27 ounce, 7.59 gram

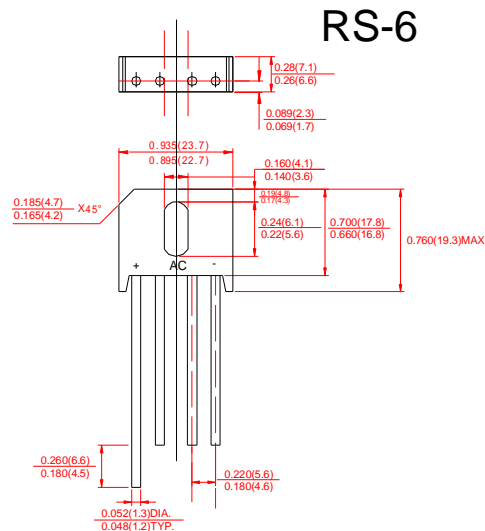

Dimensions in inches and (millimeters)

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25°C ambient temperature unless otherwise specified.
Single phase, half wave, 60Hz, resistive or inductive load.
For capacitive load derate current by 20%.

	SYMBOLS	KBU 10A	KBU 10B	KBU 10D	KBU 10G	KBU 10J	KBU 10K	KBU 10M	UNITS
Maximum Repetitive Peak Reverse Voltage	V_{RRM}	50	100	200	400	600	800	1000	Volts
Maximum RMS Voltage	V_{RMS}	35	70	140	280	420	560	700	Volts
Maximum DC Blocking Voltage	V_{DC}	50	100	200	400	600	800	1000	Volts
Maximum Average Forward Rectified Output Current, at	$T_C=50^\circ\text{C}$ (Note 2)	$I_{(AV)}$ 10.0							Amps
	$T_C=100^\circ\text{C}$ (Note 2)	8.0							
	$T_A=45^\circ\text{C}$ (Note 3)	6.0							
Peak Forward Surge Current 8.3ms single half sine-wave superimposed on rated load (JEDEC Method)	I_{FSM}	350							Amps
Rating for Fusing (t<8.3ms)	I^2t	373							A ² s
Maximum Instantaneous Forward Voltage Drop per bridge element at 10.0A	V_F	1.0							Volts
Maximum DC Reverse Current at rated DC blocking voltage per element	$T_A=25^\circ\text{C}$	I_R 5.0							μAmps
	$T_A=100^\circ\text{C}$	1.0							mAmps
Typical Junction Capacitance (Note 1)	C_j	200							pF
Typical Thermal Resistance (Note 2)	$R_{\theta JC}$	5.0							°C/W
Operating and Storage Temperature Range	T_J, T_{STG}	-55 to +150							°C

NOTES:

1. Measured at 1.0 MHz and applied reverse voltage of 4.0 Volts.
2. Unit mounted on 6.0"x5.5"x0.24" thick (15x14x0.6cm) Al. plate.
3. Unit mounted in free air, no heatsink, P.C.B at 0.375" (9.5mm) lead length with 0.5"x0.5" (12x12cm) copper pads



MASTER INSTRUMENT CORPORATION

**SINGLE-PHASE BRIDGE RECTIFIER
KBU10A THRU KBU10M**

**VOLTAGE RANGE 50 to 1000 Volts
CURRENT 10.0 Amperes**

RATINGS AND CHARACTERISTIC CURVES KBU10A THRU KBU10M

FIG.1-DERATING CURVE FOR OUTPUT RECTIFIED CURRENT

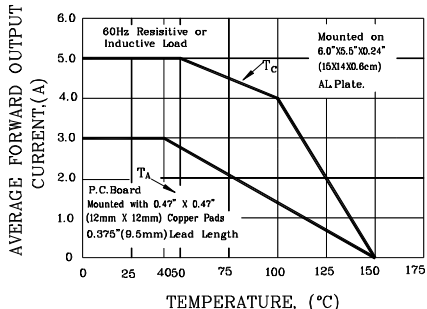


FIG.2-MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT PER ELEMENT

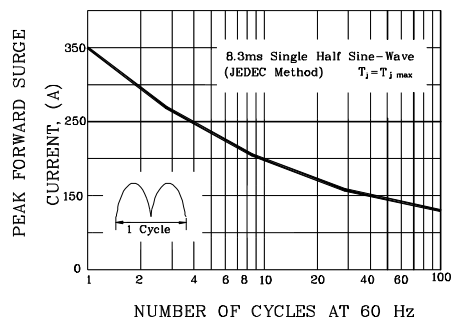


FIG.3-TYPICAL FORWARD CHARACTERISTICS PER BRIDGE ELEMENT

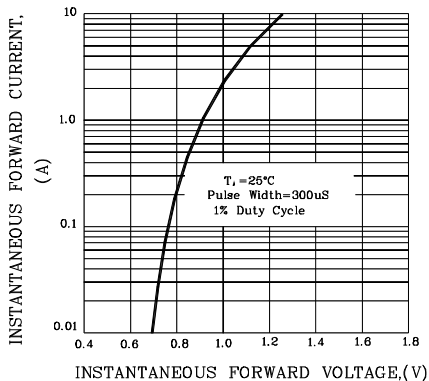


FIG.4-TYPICAL REVERSE CHARACTERISTICS PER BRIDGE ELEMENT

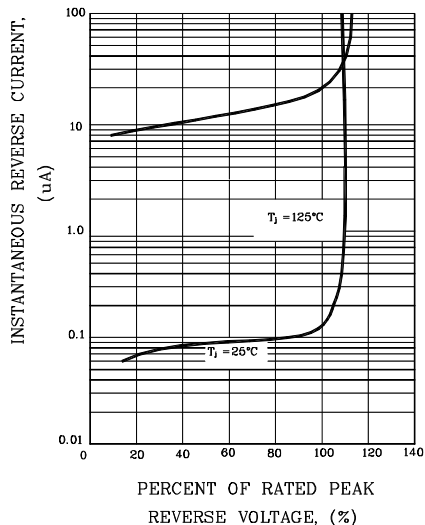


FIG.5-TYPICAL JUNCTION CAPACITANCE PER BRIDGE ELEMENT

